


BRITEBLADE

- Fully meets EN1838
- Metal body construction
- Suitable for single or doubled sided use
- Suitable for solid or suspended ceilings
- Compatible with Easichек™ system
- Available with self test

JSB Briteblade has similar styling and construction to the Brite Edge but incorporates a traditional fluorescent light source and has a smaller overall height, making it ideal for applications with limited headroom. Installation is simple into either solid or suspended ceilings due to the innovative rotating fixing arms that allow the fitting to pass easily into the mounting aperture on solid ceilings and a suspension spring system for ease of legend retention.

268



Silver finish

WHERE TO USE BRITEBLADE

- Retail
- Boardrooms
- Hospitals
- Offices
- Hotels, pubs and restaurants
- Schools, colleges and universities

LAMP OPTIONS

- 8 Watt T5 fluorescent 35000°K G5 cap




MATERIALS

- Body - Steel powder coated in permawhite finish
- Trim - Steel powder coated in a choice of colours
- Legend panel clear acrylic with pre applied screen print legend
- Battery (self contained versions) Sealed Nickel Cadmium type.

INSTALLATION NOTES

- Can be installed into solid or suspended ceilings
- Body is retained into ceiling by 4 suspension arms which are retracted into the luminaire body prior to installation but rotate outwards into position as the fixing screws are tightened
- Legend is ordered separately

DIMENSIONS

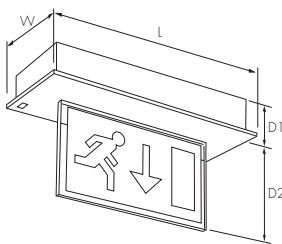

L (mm)	W (mm)	D1 (mm)	D2 (mm)
351	130	75	146

OPTIONS


- Choice of trimplate colour
- Maintained (Switchable) 3 hour duration
- Central system slave (AC/DC or static inverter)
- Intellem self check technology as detailed on page 206
- Easichек™ addressable testing as detailed on page 199

SPECIFICATION

Self contained - To specify state: recessed edgelit exit sign with metal body suitable for use in solid or suspended ceiling types. Luminaire retention to utilise retractable side arms. Legend illumination to be fully compliant with requirements of EN1838 and product to be fully compliant with EN60598-2:22 as JSB Briteblade range part no. _____

Self test / slave - To specify state: Intelligent self testing / central system compatible slave, recessed edgelit exit sign with metal body suitable for use in solid or suspended ceiling types. Luminaire retention to utilise retractable side arms. Legend illumination to be fully compliant with requirements of EN1838 and product to be fully compliant with EN60598-2:22 as JSB Briteblade range part no. _____

MAXIMUM VIEWING DISTANCE

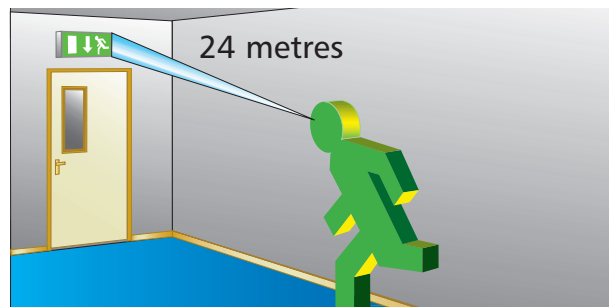

CATALOGUE NUMBERS

System Mode	White Trim Plate	Silver Trim Plate	Weight (kg)
Maintained self contained 3Hr	BBM	BBMS	1.8
Intellem self check Maintained self contained 3Hr	BBMIS	BBMSIS	1.8
24V AC/DC central system slave	BB24	BB24S	1.6
50V AC/DC central system slave	BB50	BB50S	1.6
110V AC/DC central system slave	BB110	BB110S	1.6
230V AC static inverter system slave	BB230	BB230S	1.6
CeaGuard slave	BB230CG	BB230CGS	1.6

Description	Pictogram	Cat. No.	Weight (kg)
Legend panel			
Single sided panel. Down arrow		LUCADS	0.35
Double sided panel. Left and right arrow		LUCALR	0.35
Double sided panel. Down arrow		LUCAD	0.35

Also available with Easi-Check automatic testing functionality - see page 199 for system features
Contact our customer care office for further details - 01302 303350

