


DELTA II

- Stylish curved lens
- Internal reflector to maximise spacing distances
- Optional decorative skirts to enhance appearance
- EasiCheck™ central addressable self-test options
- Available in self-contained, AC/DC and AC mains slave versions

Innovative and stylish in appearance, Delta II has been designed to meet the latest European standards for illuminance using the minimum number of luminaires. A specially designed internal reflector optimises spacing performance, ensuring Delta II provides a cost effective solution, particularly in corridor applications. Optional skirts, available in white, black, brass and silver finish, further enhance Delta's aesthetic appeal. Simple to fit, this attachment allows Delta II to complement many styles and colour schemes, including the demands of contemporary, period and prestigious environments. Central system and intelligent testing EasiCheck™ options complete this versatile range.

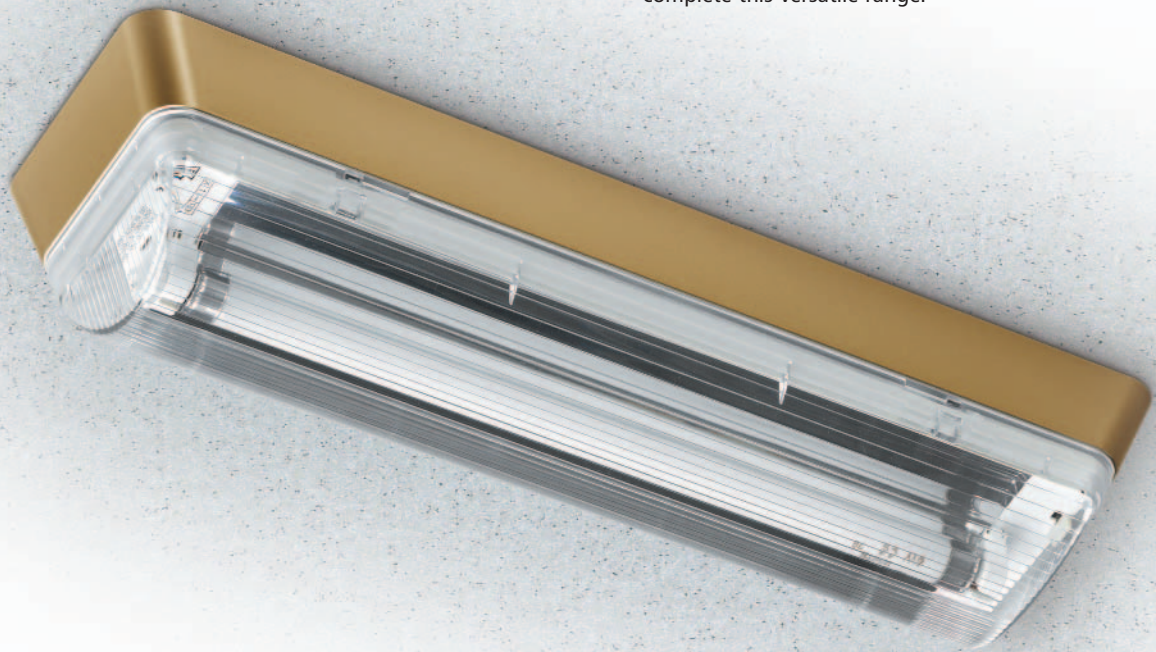

White finish skirt



Black finish skirt



Silver finish skirt

WHERE TO USE DELTA II

- Corridors
- Offices
- Hotels
- Hospitals
- Retail

LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Base - flame retardant ABS, white finish
- Lens - clear polycarbonate
- Geartray - steel, powder coated in Permawhite finish. Reflector in anodised aluminium
- Skirt - flame retardant ABS, self-coloured white or black finish/brass or silver coated finish
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for ceiling or wall mounting
- BESA entry on rear. Cable entries on ends
- Geartray and lens clip into position
- Optional skirt fitted behind base, secured when base fixed
- Supplied complete with 1 x 8W lamp

DIMENSIONS



	L (mm)	W (mm)	D (mm)
Without Skirt	353	96	75
With Skirt	380	109	75

CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)
Non-maintained	DE83ICEL	1.20
Maintained	DE83MICEL	1.30
24V AC/DC Central system slave	DE824	0.90
50V AC/DC Central system slave	DE850	0.90
110V AC/DC Central system slave	DE8110	0.90
230V AC Static inverter system slave	DE8230	0.90
Decorative Skirt		
White	DE8SKWHITE	0.11
Black	DE8SKBLACK	0.11
Brass	DE8SKBRASS	0.11
Silver	DE8SKSILVER	0.11

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features
Contact our Technical Support and Application department for further details - 01302 303350



OPTIONS

- Maintained and non-maintained operation, 3 hour duration
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions

SPECIFICATION

Self contained - To specify state: BSI Kitemarked and ICEL registered, high performance, wide spacing, self contained emergency luminaire, with internal reflector, clip-on lens and optional decorative skirt, as JSB Delta II range, part no. _____

Slave - To specify state: Central system compatible, high performance, wide spacing, slave emergency luminaire, with internal reflector, clip-on lens and optional decorative skirt, as JSB Delta II range, part no. _____

PHOTOMETRIC DATA

Luminaire type	Mounting height (m)	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
		1	2	3	4	1	2	3	4
Self-contained									
NM	2.5	1.8	7.8	3.8	1.0	2.7	9.3	4.7	1.3
	3.0	1.0	7.4	3.4	1.1	2.5	10.0	5.0	1.1
	4.0	-	-	-	-	0.7	10.6	5.3	0.5
M	2.5	0.9	7.0	3.4	0.7	2.4	8.9	4.4	1.1
	3.0	0.9	5.6	3.8	0.7	2.2	9.2	4.7	1.0
	4.0	-	-	-	-	0.5	8.4	5.6	0.4
Slave									
AC/DC	2.5	3.7	10.2	5.0	1.8	3.5	11.7	5.6	1.7
	4.0	2.2	8.5	6.0	1.6	3.5	12.7	6.7	1.6
	6.0	-	-	-	-	2.1	8.6	5.9	1.4
AC/AC	2.5	3.8	10.2	5.2	1.6	3.6	11.6	5.7	1.3
	4.0	1.3	10.0	5.0	1.0	3.5	13.2	7.0	1.3
	6.0	-	3.4	2.2	-	1.2	15.4	7.7	0.6

See page 445 for Design Guide



Delta II without optional skirt