

EXIT SE

- Large format, ideal for open plan areas
- Robust construction
- 39 metres viewing distance
- Large downlight panel
- EasiCheck™ central addressable self-test options
- Available in self-contained, AC/DC and AC mains slave versions

Traditionally styled, Exit SE is a large format exit sign that is ideally suited to large, open plan areas, such as shopping malls, call centres and function rooms.

Robustly constructed from steel, the luminaire features a screw fixed frame that retains the legend panel securely. The exit legend is screen printed on the inner surface of the panel providing a high degree of resistance from cleaning abrasion or accidental scratching. Exit SE is therefore suitable for public spaces where such damage may occur. Good threshold illumination is obtained via the large opal downlight panel, offering improved indication of escape routes during mains power failure.



WHERE TO USE EXIT SE

- Open plan offices
- Reception areas
- Foyers and atria
- Shopping malls
- Hotels and pubs
- Function rooms
- Retail
- Universities, schools and colleges

LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Body and gear cover - steel, powder coated in Permawhite finish
- Legend panel - clear acrylic with rear screen printing
- Downlight panel - opal polycarbonate
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for wall mounting
- Direct screw fix, cable entry knock-outs on rear, ends and top
- Screw fixed gear cover
- Front frame retained by screws on side of body
- Legend panel (ordered separately), locates inside frame
- Supplied complete with 1 x 8W lamp

DIMENSIONS



L (mm)	W (mm)	D (mm)
482	238	65

CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)
Exit SE luminaire - order legend panel separately		
Non-maintained	SE83ICEL	3.50
Maintained	SE83MICEL	3.60
50V AC/DC Central system slave	SE850	2.10
110V AC/DC Central system slave	SE8110	2.10
230V AC Static inverter system slave	SE8230	2.10

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features
Contact our Technical Support and Application department for further details - 01302 303350

EasiCheck™

OPTIONS


- Maintained and non-maintained, 3 hour duration
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- Choice of legend panels

SPECIFICATION

Self contained - To specify state: BSI Kitemarked, back-lit, large format self contained emergency sign, with large downlight panel and 39m viewing distance legends, as JSB Exit SE range, part no. _____

Slave - To specify state: Central system slave, back-lit, large format emergency sign, with large downlight panel and 39m viewing distance legends, as JSB Exit SE range, part no. _____

MAXIMUM VIEWING DISTANCE

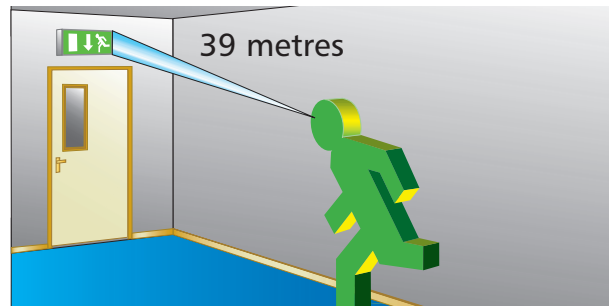

Description	Pictogram	Cat. No.	Weight (kg)
Legend panel			
Down arrow		SEAD	0.10
Left arrow		SEAL	0.10
Right arrow		SEAR	0.10