

MANHATTAN

- Modern sculptured profile
- Premium quality extruded aluminium body
- Convenient first fix mounting box
- Patented uniform luminance legend panel
- EasiCheck™ central addressable self-test options
- Available in self-contained, AC/DC and AC mains slave versions

Contemporary styling and traditional materials are blended together perfectly to produce the attractive Manhattan range of pendant exit signs. High quality aluminium extrusions lend the luminaire a distinctive, sculptured appearance which is suitable for a wide variety of interiors and applications, from offices to hotels. Manhattan also benefits from a modern, curved legend panel that incorporates a patented variable pitch dot, screen printing process, which ensures compliance with European luminance and uniformity standards. A remote mounting box offers the convenience of quick first fix and simplified installation and can be installed onto ceilings or walls.



WHERE TO USE MANHATTAN

- Offices
- Boardrooms
- Reception areas
- Foyers and atria
- Hotels and pubs
- Restaurants
- Leisure clubs
- Retail
- Universities, schools and colleges

LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Body - extruded aluminium powder coated in white finish, with flame retardant ABS end caps
- Mounting box - steel mounting plate, with flame retardant ABS cover
- Legend panel - clear acrylic with patented variable pitch dot, screen print
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for wall or ceiling mounting
- Mounting plate direct screw fixed, with rear cable entry. Cover clips over base plate
- Supplied with 4 core cable connecting body to mounting plate, adjustable for length on site
- Legend locates onto pegs inside body
- Body sections lock together via screwed end cap
- Supplied complete with 1 x 8W lamp

DIMENSIONS

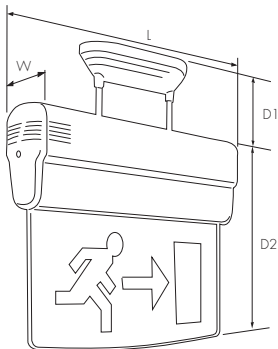

L (mm)	W (mm)	D1 (mm)	D2 (mm)
390	68	61 min - 560 max	290

CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)
Manhattan luminaire - order legend panel separately		
Non-maintained	MA83230240	2.00
Maintained	MA83M230240	2.10
24V AC/DC Central system slave	MA824	2.10
50V AC/DC Central system slave	MA850	2.10
110V AC/DC Central system slave	MA8110	2.10
230V AC Static inverter system slave	MA8230	2.10

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features. Contact our Technical Support and Application department for further details - 01302 303350

EasiCheck™

OPTIONS


- Maintained and non-maintained, 3 hour duration
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- Choice of legend panels

SPECIFICATION

Self contained - To specify state: BSI Kitemarked, edge-lit self contained emergency sign, with adjustable suspensions, extruded aluminium body and legend panels with variable pitch dot screen printing, fully compliant with EN1838, as JSB Manhattan range, part no. _____

Slave - To specify state: Central system slave, edge-lit emergency sign, with adjustable suspensions, extruded aluminium body and legend panels with variable pitch dot screen printing, fully compliant with EN1838, as JSB Manhattan range, part no. _____

MAXIMUM VIEWING DISTANCE

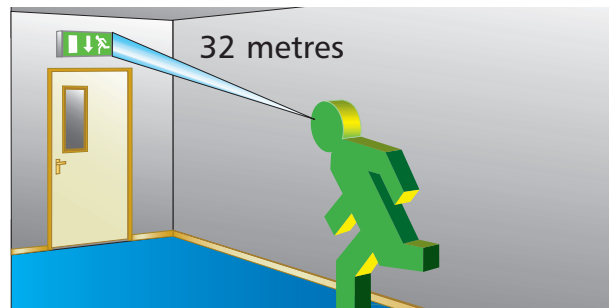

Description	Pictogram	Cat. No.	Weight (kg)
Legend panel			
Down arrow - single sided		MAAD	0.75
Left arrow - single sided		MAAL	0.75
Right arrow - single sided		MAAR	0.75