

NEW SAFE EX

- Attractive modern styling
- Easy and fast to install
- Competitive, value for money product
- Uniformly lit legend, compliant with EN1838
- Fresnel lens downlight panel
- EasiCheck™, Intellem and CeaGuard self-testing options

New Safe Ex is a popular choice for many installations. Offering excellent value for money, it can be quickly installed thanks to time saving features such as BESA piercings, keyhole screw fixings, clip out cable entry and a removable, hinged geartray. The legend panel has been thoughtfully designed to slide in from below, permitting installation close to the ceiling or adjacent walls. The light source also provides excellent threshold lighting, thanks to a high quality fresnel lens downlight panel. New Safe Ex is now available with Intellem or EasiCheck™ self-test functionality, offering even greater choice for this ubiquitous exit sign.



WHERE TO USE NEW SAFE EX

- Offices
- Corridors
- Boardrooms
- Receptions and foyers
- Hotels and pubs
- Restaurants
- Retail
- Universities, schools and colleges



LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Body - steel, powder coated in RAL9010 finish, with polycarbonate end caps
- Geartray - steel, powder coated in Permawhite finish
- Legend panel - acrylic
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for wall mounting
- BESA entry on rear, or direct screw fix via keyhole slots
- Additional top cable entry, with clip out grommet
- Removable gear tray clips into body, hinges and locates via locking tabs
- Legend panel (ordered separately) slides in from bottom
- Supplied complete with 1 x 8W lamp

DIMENSIONS



L (mm)	W (mm)	D (mm)
402	184	75

OPTIONS


- Maintained and non-maintained, 3 hour duration
- Intellem self test. Technology detailed on page 206
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- CeaGuard testing versions. See pages 422
- Choice of legend panels

SPECIFICATION

Self contained - To specify state: BSI Kitemarked, back-lit self contained emergency sign, with hinged removable geartray, fresnel downlight lens and slide in legend panel, fully compliant with EN1838, as Menvier New Safe Ex range, part no. _____

Self-test/Slave - To specify state: Intelligent self-testing/Central system slave, back-lit emergency sign, with hinged removable geartray, fresnel downlight lens and slide in legend panel, fully compliant with EN1838, as Menvier New Safe Ex range, part no. _____

MAXIMUM VIEWING DISTANCE

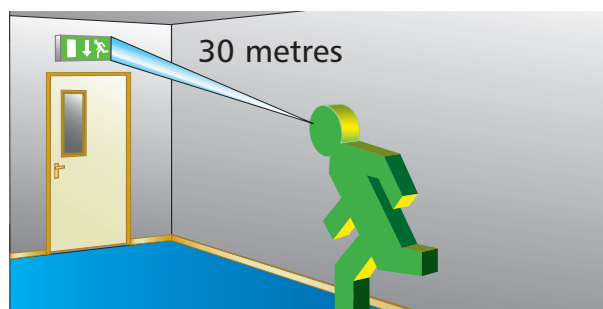

CATALOGUE NUMBERS

System Mode	Cat. No.	Weight (kg)
New Safe Ex luminaire - order legend panel separately		
Non-maintained	SXN	2.30
Maintained	SXM	2.70
Intellem Infra-Red - Non-maintained	SXNIR	2.30
Intellem Infra-Red - Maintained	SXMIR	2.70
Intellem Self-Check - Non-maintained	SXNIS	2.30
Intellem Self-Check - Maintained	SXMIS	2.70
CeaGuard slave	SX230CG	2.10
24V AC/DC Central system slave	SX24	2.10
50V AC/DC Central system slave	SX50	2.10
110V AC/DC Central system slave	SX110	2.10
230V AC Static inverter system slave	SXS8230	2.10

Description	Pictogram	Cat. No.	Weight (kg)
Legend panel			
Down arrow		PEXD	0.10
Left arrow		PEXL	0.10
Right arrow		PEXR	0.10

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features
Contact our Technical Support and Application department for further details - 01302 303350

EasiCheck™

NEW SAFE EX