

RECESSED SAFE EDGE

- Unobtrusive flush mounted design
- Choice of chrome, gold or white finish
- Quick and easy installation
- Superb, uniformly lit legend panel
- EasiCheck™, Intellem and CeaGuard self-testing options
- Available in self-contained, AC/DC and AC mains slave versions

Designed for use in prestigious locations, Recessed Safe Edge is suitable for flush mounting into both solid and suspended ceilings. Installation time is kept to a minimum thanks to a separate recessing frame which has adjustable fixing clamps. The body is then simply clipped into position after connection of the supply cables, followed by insertion of the lamp and legend panel and finally the clip-on cover. The legend panel itself is constructed with an advanced technology variable density prism honeycomb inside, evenly distributing light to meet fully the requirements of EN1838. Chrome, gold or white colour finishes ensure Recessed Safe Edge will blend into any interior.



Chrome finish



White finish

WHERE TO USE RECESSED SAFE EDGE

- Offices
- Boardrooms
- Hotels and pubs
- Restaurants
- Hospitals
- Leisure clubs
- Retail
- Reception and waiting areas
- Universities, schools and colleges

LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Body, recessing frame and gear cover - flame retardant ABS, self coloured white finish/gold or chrome coated finish
- Legend panel - acrylic with variable density prism honeycomb
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for flush mounting into ceiling
- Recessing frame secured by adjustable clamps or screw fixed
- Front access only is required to install luminaire body
- BESA entry drill-outs on rear. Cable entries rear and end
- Connect supply then clip body into frame
- Lamp inserted into extruded channel on legend panel (ordered separately)
- Cover plate clips onto frame and internal cradle moulding supports panel
- Supplied complete with 1 x 8W lamp

MAXIMUM VIEWING DISTANCE

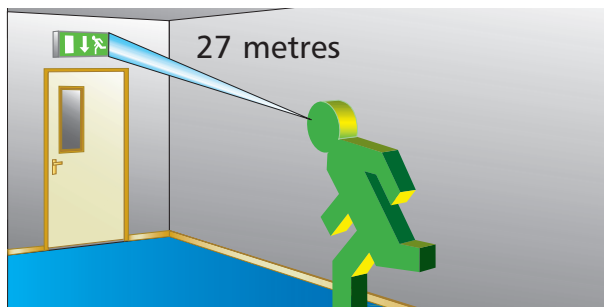

OPTIONS


- Maintained (switchable), 3 hour duration
- Intellem self test. Technology detailed on page 206
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- CeaGuard testing versions. See page 422
- Choice of legend panels

SPECIFICATION

Self contained - To specify state: BSI Kitemarked, recessed edge-lit self contained emergency sign, fast fit body, finished white/chrome/gold, and legend panels with variable density prisms, fully compliant with EN1838, as Menvier Recessed Safe Edge range, part no. _____

Self-test/Slave - To specify state: Intelligent self-testing/Central system slave, recessed edge-lit emergency sign, fast fit body, finished white/chrome/gold, and legend panels with variable density prisms, fully compliant with EN1838, as Menvier Recessed Safe Edge range, part no. _____

DIMENSIONS

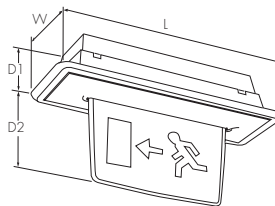

L (mm)	W (mm)	D1 (mm)	D2 (mm)	Cut out (mm)
407	150	85	145	364 x 112

CATALOGUE NUMBERS

System Mode	White Finish	Chrome Finish	Gold Finish	Weight (kg)
Recessed Safe Edge luminaire - order legend panel separately				
Maintained	RSEM	RSEMCH	RSEMGD	1.40
Intellem Self-Check - Maintained	RSEMIS	RSEMCHS	RSEMGDIS	1.40
CeaGuard slave	RSE230CG	RSE230CGCH	RSE230CGGD	1.00
24V AC/DC Central system slave	RSE24	RSE24CH	RSE24GD	1.00
50V AC/DC Central system slave	RSE50	RSE50CH	RSE50GD	1.00
110V AC/DC Central system slave	RSE110	RSE110CH	RSE110GD	1.00
230V AC Static inverter system slave	RSES230	RSES230CH	RSES230GD	1.00

Description	Pictogram	Cat. No.	Weight (kg)
Legend panel			
Single sided panel. Down arrow		SEDS	0.45
Double sided panel. Left and right arrow		SEDLR	0.45
Double sided panel. Down arrow		SEDDSS	0.45

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features
Contact our Technical Support and Application department for further details - 01302 303350



RECESSED SAFE EDGE