

# SAFE EDGE

- Unique, stylish design
- Choice of chrome, gold or white finish
- Fast and easy to install
- Legend panel pivots for use on walls or sloping ceilings
- Superb, uniformly lit legend panel
- EasiCheck™, Intellem and CeaGuard self-testing options

Compact and stylish, with a unique curved body profile, Safe Edge is ideal for applications where clear direction needs to be combined with good aesthetic appearance. Exit routes are clearly indicated thanks to a special variable density prism honeycomb inside the legend panel. This automatically distributes light evenly over the entire legend panel, to meet fully the requirements of EN1838. The legend panel also pivots, permitting installation onto sloping ceilings in addition to walls.



Wall mounted - gold finish



White finish

## WHERE TO USE SAFE EDGE

- Offices
- Boardrooms
- Hotels and pubs
- Restaurants
- Hospitals
- Leisure clubs
- Retail
- Reception and waiting areas
- Universities, schools and colleges

### LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




### MATERIALS

- Base, body and gear cover - flame retardant ABS, self-coloured white finish/gold or chrome coated finish
- Legend panel - clear acrylic with internal variable density prism honeycomb
- Batteries (self-contained versions) - sealed nickel cadmium

### INSTALLATION NOTES

- Suitable for ceiling or wall mounting
- BESA entry drill-outs on rear or direct screw fix. Cable entries rear and end
- Gear cover clips into position
- Lamp inserted into extruded channel on legend panel (ordered separately)
- Body cover clips onto base and internal cradle moulding supports panel
- Supplied complete with 1 x 8W lamp

### DIMENSIONS



L (mm)	W (mm)	D1 (mm)	D2 (mm)
358	130	77	162

### OPTIONS


- Maintained (switchable), 3 hour duration
- Intellem self test. Technology detailed on page 206
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- CeaGuard testing versions. See page 422
- Choice of legend panels

### SPECIFICATION

Self contained - To specify state: BSI Kitemarked, edge-lit self contained emergency sign for wall/ceiling mounting, finished white/chrome/gold and legend panels with variable density prisms, fully compliant with EN1838, as Menvier Safe Edge range, part no. \_\_\_\_\_

Self-test/Slave - To specify state: Intelligent self-testing/Central system slave, edge-lit emergency sign for wall/ceiling mounting, finished white/chrome/gold and legend panels with variable density prisms, fully compliant with EN1838, as Menvier Safe Edge range, part no. \_\_\_\_\_

### MAXIMUM VIEWING DISTANCE

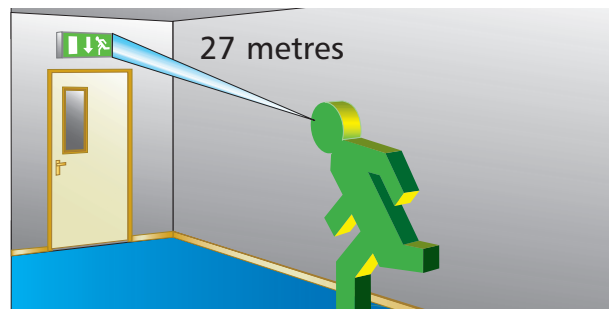

### CATALOGUE NUMBERS

System Mode	White Finish	Chrome Finish	Gold Finish	Weight (kg)
<b>Safe Edge luminaire - order legend panel separately</b>				
Maintained	SED	SEDCH	SEDGD	1.80
Intellem Self-Check - Maintained	SEDIS	SEDCHIS	SEDGDIS	1.80
CeaGuard slave	SED230CG	SED230CGCH	SED230CGGD	1.60
24V AC/DC Central system slave	SED24	SED24CH	SED24GD	1.60
50V AC/DC Central system slave	SED50	SED50CH	SED50GD	1.60
110V AC/DC Central system slave	SED110	SED110CH	SED110GD	1.60
230V AC Static inverter system slave	SEDS230	SEDS230CH	SEDS230GD	1.60
Description	Pictogram	Cat. No.	Weight (kg)	
<b>Legend panel</b>				
Single sided panel. Down arrow		SEDS	0.45	
Double sided panel. Left and right arrow		SEDIR	0.45	
Double sided panel. Down arrow		SEDDSS	0.45	

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features  
Contact our Technical Support and Application department for further details - 01302 303350

EasiCheck™

SAFE EDGE