


VISTRAL

- Attractive, curved, low profile design
- Stylish exit sign using legend kit
- EasiCheck™, Intellem and CeaGuard self-testing options
- Available in self-contained, AC/DC and AC mains slave versions

Equally at home in prestigious installations and commercial interiors, Vistral is an ultra-low profile luminaire with a stylish design, allowing it to blend unobtrusively into any environment. The luminaire has a maximum depth of only 50mm and appears even slimmer thanks to an elegantly curved upper gallery, which also incorporates the efficient clear fresnel lens. The excellent flashing developed by this wide lens also permits Vistral to be deployed as an attractive exit sign, using the optional legend kit.

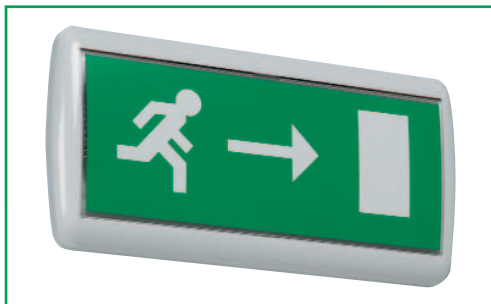

Vistral with legend

WHERE TO USE VISTRAL

- Offices
- Hotels
- Restaurants
- Hospitals
- Leisure clubs
- Retail

LAMP OPTIONS

- 8W T5 fluorescent, 3500°K - G5 cap




MATERIALS

- Upper/lower gallery - polycarbonate and ABS
- Lens - clear polycarbonate
- Batteries (self-contained versions) - sealed nickel cadmium

INSTALLATION NOTES

- Suitable for ceiling or wall mounting
- Lower gallery fixed direct, via keyhole slots
- BESA entry on rear. Cable entries on side and end
- Upper gallery and lens have snap fix retention
- Supplied complete with 1 x 8W lamp

DIMENSIONS



L (mm)	W (mm)	D (mm)
365	180	50

OPTIONS

- Maintained and non-maintained operation, 3 hour duration
- Intellem self test. Technology detailed on page 206
- EasiCheck™ addressable testing. System detailed on page 199
- Central system slave versions
- CeaGuard testing versions. See page 422

SPECIFICATION

Self contained - To specify state: BSI Kitemarked and ICEL registered, 50mm deep ultra-low, curved profile decorative self contained emergency luminaire, with snap fix high quality fresnel lens and upper gallery, in white finish, as Menvier Vistral range, part no. _____

Self-test/Slave - To specify state: Intelligent self-testing/Central system slave compatible, 50mm deep ultra-low curved profile decorative emergency luminaire, with snap fix high quality fresnel lens and upper gallery, in white finish, as Menvier Vistral range, part no. _____

PHOTOMETRIC DATA

Luminaire type	Mounting height (m)	Lux level directly under	Escape route 2m wide 1 lux min				Open (anti-panic) area 0.5 lux min			
			↔	↔	↔	↔	↙ ↘	↙ ↘	↙ ↘	↙ ↘
Self-contained										
NM	2.5	2.70	2.4	5.8	5.4	1.9	2.0	6.3	6.2	1.9
	4.0	1.06	1.6	7.2	5.1	0.6	2.5	7.4	7.0	1.7
	6.0	0.47	-	-	-	-	-	8.8	7.4	-
M	2.5	2.16	2.3	5.6	5.0	1.7	2.0	5.9	5.7	1.7
	4.0	0.90	-	6.8	4.4	-	2.3	7.0	6.7	1.5
	6.0	0.40	-	-	-	-	-	8.5	7.0	-
Slave										
AC/DC	2.5	4.89	2.9	6.8	6.8	2.6	2.3	7.5	7.2	2.3
	4.0	1.91	3.5	8.6	7.4	2.3	3.0	8.9	8.9	2.5
	6.0	0.85	-	-	-	-	3.5	10.0	9.8	2.1
AC/AC	2.5	6.7	3.1	7.8	7.8	3.0	2.7	8.4	7.7	2.0
	4.0	2.6	3.9	9.0	8.4	2.9	3.2	9.8	9.8	2.1
	6.0	1.1	3.1	11.2	7.6	1.4	3.9	11.2	11.2	1.9

See page 445 for Design Guide

CATALOGUE NUMBERS

System Mode	Order Code	Weight (kg)
Non-maintained	VSN	1.20
Maintained	VSM	1.40
Intellem Self-Check - Non-maintained	VSNIS	1.20
Intellem Self-Check - Maintained	VSMIS	1.40
Intellem Infra-Red - Non-maintained	VSNIR	1.20
Intellem Infra-Red - Maintained	VSMIR	1.40
CeaGuard slave	VS230CG	0.95
24V AC/DC Central system slave	VS24	0.95
50V AC/DC Central system slave	VS50	0.95
110V AC/DC Central system slave	VS110	0.95
230V AC Static inverter system slave	VS8S230	0.95

Description

European format selfadhesive legend kit	LEXSAVS
---	---------

Also available with EasiCheck™ automatic testing functionality - see page 199 for system features
Contact our Technical Support and Application department for further details - 01302 303350

