

# EMERGENCY LIGHTING AND ORIENTATION SYSTEMS

ARSEL 



## DEKOLITE DOUBLE FACED EMERGENCY GUIDANCE FIXTURE

- Surface mounting, metal sheet case
- At the bottom, 4 round lighted windows for floor lighting
- 3 mm thick acrylic light panel

- Where the emergency exit is not directly visible, two-way marking is required, corridor and similar applications are used.
- There are 2 fluorescent lamps with fluorescent lamps and continuous lighting. One of the lamps is on line voltage and the other is power failure.
- is an independent emergency exit orientation luminaire located within the battery and power supply..
- Continuous charging method keeps the battery pack full and ready.
- The mains supply voltage is standard 220 volts AC 50 Hz.
- Charging time for first use is 24 hours.
- It can withstand fluctuations up to 285 volts at mains voltage.
- Switches to emergency lighting mode under 150 volts, charging over 185 volts.
- It is manufactured according to TS 8710 EN60598-2-22 standard in the framework of ISO 9001-2000 quality management system.

### USAGE AREAS

- Offices
- Grocery stores
- Corridors
- Restaurants and bars
- Universities, Student dormitories, Schools and colleges

### LAMP OPTIONS

- G5 socket T5 8w fluorescent bulb, 6500°K
- White light LED bulb, 6500°K

### BODY STRUCTURE

- Body - Powder white painted sheet metal chassis
- With label panel - 3 mm acrylic panel, application of latex on white foil
- BATTERY - Nickel-cadmium in all models

### OPTIONS



- Continuous and emergency models.
- 1-3 hour emergency backup times.



## DEKOLITE DOUBLE SIDE EMERGENCY GUIDANCE FIXTURE

MODEL CODE	LIGHTING STYLE	MOUNTING STYLE	LAMP	LIGHT FACE	DURATION (minute)	DIMENSIONS (W-L-H)mm	WEIGHT	IP CLASS	ISOLATION CLASS	OPERATION TEMP	POWER CONSUMPTION	OPERATING VOLTAGE
AE 3121	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 60 m.	75x320x165mm	1,60kg	40	I	-16/+45°	3w	220-240
AE 3122	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 120 m.	75x320x165mm	1,60kg	40	I	-16/+45°	3w	220-240
AE-3123	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 180 m.	75x320x165mm	1,60kg	40	I	-16/+45°	3w	220-240
AE-3221	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 60 m.	75x320x165mm	2,00kg	40	I	-16/+45°	11w	220-240
AE-3222	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 120 m.	75x320x165mm	2,00kg	40	I	-16/+45°	11w	220-240
AE-3223	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 180 m.	75x320x165mm	2,00kg	40	I	-16/+45°	11w	220-240
AE-3123-L	Emergency Light	Ceiling Mount	20xF LED	Double Face	Emergency 180 m.	75x320x165mm	1,35kg	40	I	-16/+45°	1w	220-240
AE-3223-L	Maintained	Ceiling Mount	20xF LED	Double Face	Emergency 180 m.	75x320x165mm	1,50kg	40	I	-16/+45°	2w	220-240
AE-3020	Mains Light	Ceiling Mount	8 wat	Double Face	—	75x320x165mm	1,60kg	40	I	-16/+45°	8w	220-240

## DIMENSIONS

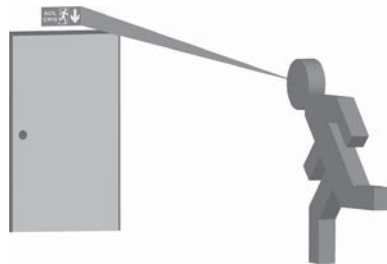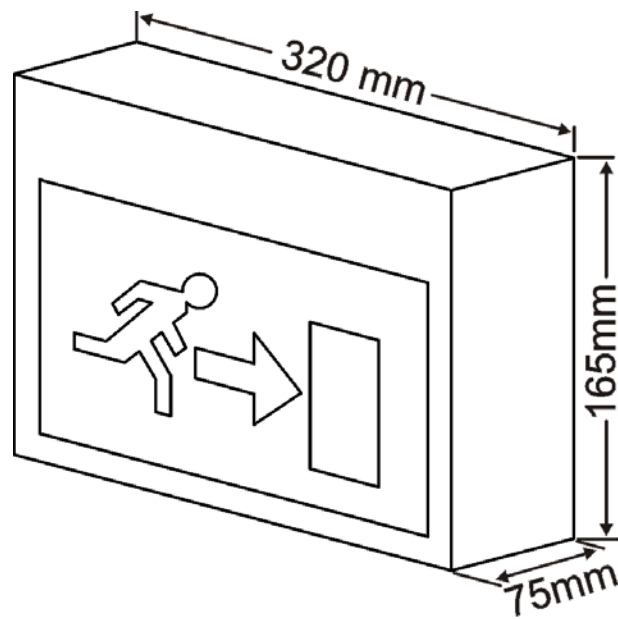

**Visible Distance**  
28 meter