

EMERGENCY LIGHTING AND ORIENTATION SYSTEMS

ARSEL 



DEKOLITE-Z DOUBLE FACED EMERGENCY GUIDANCE FIXTURE

- Surface mounting, extruded aluminum profile body, ABS plastic corners.
- 3mm acrylic diffuser
- Different size options
- İki yüzü ışıklı panel armatür

- It can be used in ceiling mount applications, with aluminum profile body, fluorescent bulb and LED, decorative emergency exit directional fitting.
- The model table is divided into 3 according to the measurement. Electrostatic powder coated aluminum profile and rear mounting plate combined with ABS brackets
- There are 2 fluorescent lamps with fluorescent lamps and continuous lighting. One of the lamps is on line voltage and the other is power failure.
- is an independent emergency exit orientation luminaire located within the battery and power supply..
- Continuous charging method keeps the battery pack full and ready.
- The mains supply voltage is standard 220 volts AC 50 Hz.
- Charging time for first use is 24 hours.
- It can withstand fluctuations up to 285 volts at mains voltage.
- Switches to emergency lighting mode under 150 volts, charging over 185 volts.
- It is manufactured according to TS 8710 EN60598-2-22 standard in the framework of ISO 9001-2000 quality management system.

USAGE AREAS

- Offices
- Grocery stores
- Warehouses
- Parking lots and large areas
- Hospitals
- Corridors
- Restaurants and bars
- Universities, Student dormitories, Schools and colleges

LAMP OPTIONS

- G5 socket T5 8w fluorescent bulb, 6500°K
- G13 socket T8 18w fluorescent bulb, 6500°K
- White light LED bulb, 6500°K

BODY STRUCTURE

- Body - Extruded aluminum profile body, ABS plastic brackets
- With label panel - 3 mm acrylic panel, application of latex on white foil
- BATTERY - Nickel-cadmium in all models

OPTIONS

- Continuous and emergency models.
- 1-3 hour emergency backup times.



ISO 9001
LI-C (Certification)



2 YEAR
GUARANTEE



DEKOLITE Z30 SERIES DOUBLE FACED CEILING MOUNT

MODEL CODE	LIGHTING STYLE	MOUNTING STYLE	LAMP	LIGHT FACE	DURATION (minute)	DIMENSIONS (W-L-H)mm	WEIGHT	IP CLASS	ISOLATION CLASS	OPERATION TEMP	POWER CONSUMPTION	OPERATING VOLTAGE
AE 3121	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 60 m.	75x320x165mm	1,75kg	40	I	-16/+45°	3w	220-240
AE 3122	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 120 m.	75x320x165mm	1,90kg	40	I	-16/+45°	3w	220-240
AE-3123	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 180 m.	75x320x165mm	1,95kg	40	I	-16/+45°	3w	220-240
AE-3221	Kombine Sürekli	Ceiling Mount	2x8 wat	Double Face	Emergency 60 m.	75x320x165mm	2,15kg	40	I	-16/+45°	11w	220-240
AE-3222	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 120 m.	75x320x165mm	2,30kg	40	I	-16/+45°	11w	220-240
AE-3223	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 180 m.	75x320x165mm	2,35kg	40	I	-16/+45°	11w	220-240
AE-3123-L	Emergency Light	Ceiling Mount	500lm LED	Double Face	Emergency 180 m.	75x320x165mm	2,25kg	40	I	-16/+45°	1w	220-240
AE-3223-L	Maintained	Ceiling Mount	500lm LED	Double Face	Emergency 180 m.	75x320x165mm	2,25kg	40	I	-16/+45°	5,5w	220-240
AE-3020	Mains Light	Ceiling Mount	8 wat	Double Face	—	75x320x165mm	1,65kg	40	I	-16/+45°	8w	220-240



DEKOLITE Z40 SERIES DOUBLE FACED CEILING MOUNT

MODEL CODE	LIGHTING STYLE	MOUNTING STYLE	LAMP	LIGHT FACE	DURATION (minute)	DIMENSIONS (W-L-H)mm	WEIGHT	IP CLASS	ISOLATION CLASS	OPERATION TEMP	POWER CONSUMPTION	OPERATING VOLTAGE
AE-4121	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 60 m.	75x400x180mm	2,10kg	40	I	-16/+45°	3w	220-240
AE-4122	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 120 m.	75x400x180mm	2,25kg	40	I	-16/+45°	3w	220-240
AE-4123	Emergency Light	Ceiling Mount	8 wat	Double Face	Emergency 180 m.	75x400x180mm	2,30kg	40	I	-16/+45°	3w	220-240
AE 4221	Kombine Sürekli	Ceiling Mount	2x8 wat	Double Face	Emergency 60 m.	75x400x180mm	2,50kg	40	I	-16/+45°	11w	220-240
AE 4222	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 120 m.	75x400x180mm	2,65kg	40	I	-16/+45°	11w	220-240
AE-4223	Combined m.	Ceiling Mount	2x8 wat	Double Face	Emergency 180 m.	75x400x180mm	2,70kg	40	I	-16/+45°	11w	220-240
AE-4123 -L	Emergency Light	Ceiling Mount	500lm LED	Double Face	Emergency 180 m.	75x400x180mm	2,60kg	40	I	-16/+45°	1w	220-240
AE-4223 -L	Maintained	Ceiling Mount	500lm LED	Double Face	Emergency 180 m.	75x400x180mm	2,60kg	40	I	-16/+45°	5,5w	220-240
AE-4020	Mains Light	Ceiling Mount	8 wat	Double Face	—	75x400x180mm	2,00kg	40	I	-16/+45°	8w	220-240



DEKOLITE Z50 SERIES DOUBLE FACED CEILING MOUNT

MODEL CODE	LIGHTING STYLE	MOUNTING STYLE	LAMP	LIGHT FACE	DURATION (minute)	DIMENSIONS (W-L-H)mm	WEIGHT	IP CLASS	ISOLATION CLASS	OPERATION TEMP	POWER CONSUMPTION	OPERATING VOLTAGE
AE-5121	Emergency Light	Ceiling Mount	18 wat	Double Face	Emergency 60 m.	75x650x350mm	4,80kg	40	I	-16/+45°	3w	220-240
AE-5122	Emergency Light	Ceiling Mount	18 wat	Double Face	Emergency 120 m.	75x650x350mm	4,95kg	40	I	-16/+45°	3w	220-240
AE-5123	Emergency Light	Ceiling Mount	18 wat	Double Face	Emergency 180 m.	75x650x350mm	5,00kg	40	I	-16/+45°	3w	220-240
AE-5221	Sürekli Yanan	Ceiling Mount	18 wat	Double Face	Emergency 60 m.	75x650x350mm	5,20kg	40	I	-16/+45°	21w	220-240
AE-5222	Maintained	Ceiling Mount	18 wat	Double Face	Emergency 120 m.	75x650x350mm	5,35kg	40	I	-16/+45°	21w	220-240
AE-5223	Maintained	Ceiling Mount	18 wat	Double Face	Emergency 180 m.	75x650x350mm	5,40kg	40	I	-16/+45°	21w	220-240
AE-5123-L	Emergency Light	Ceiling Mount	1000lm LED	Double Face	Emergency 180 m.	75x650x350mm	5,70kg	40	I	-16/+45°	2w	220-240
AE-5223 -L	Maintained	Ceiling Mount	1000lm LED	Double Face	Emergency 180 m.	75x650x350mm	5,70kg	40	I	-16/+45°	11w	220-240
AE-5010 -L	Mains Light	Ceiling Mount	1000lm LED	Double Face	—	75x650x350mm	4,80kg	40	I	-16/+45°	9,5w	220-240



DIMENSIONS

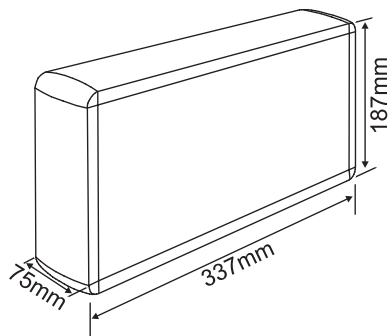

Z30 MODEL
Visible Distance 30 meter

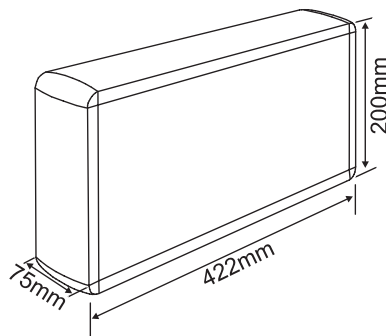

Z40 MODEL
Visible Distance 34 meter

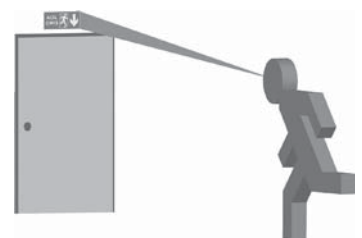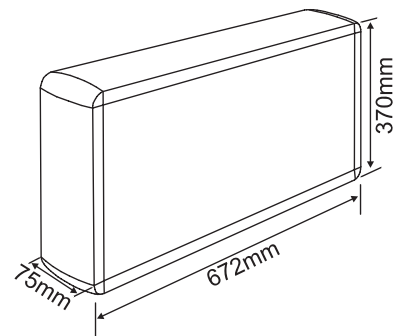

Z50 MODEL
Visible Distance 60 meter